



Ti-C Series

CURVED



Customized



Front/rear Maintenance



Remote Control



High Brightness



Wide Viewing Angle




High Protection



Top View





Back View

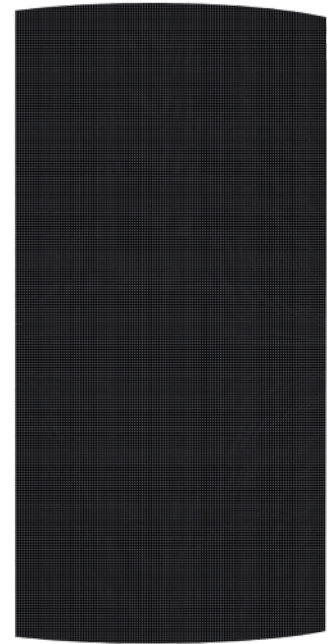


Front View


Dimension

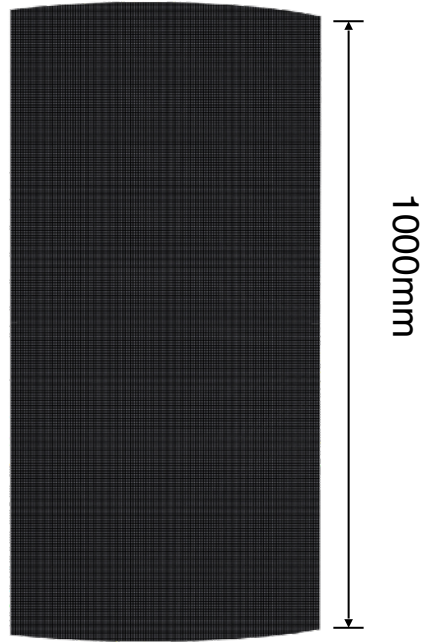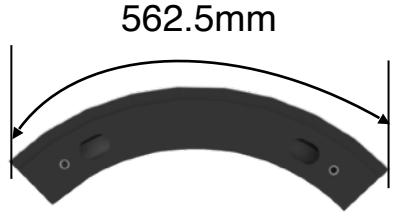


Module Size

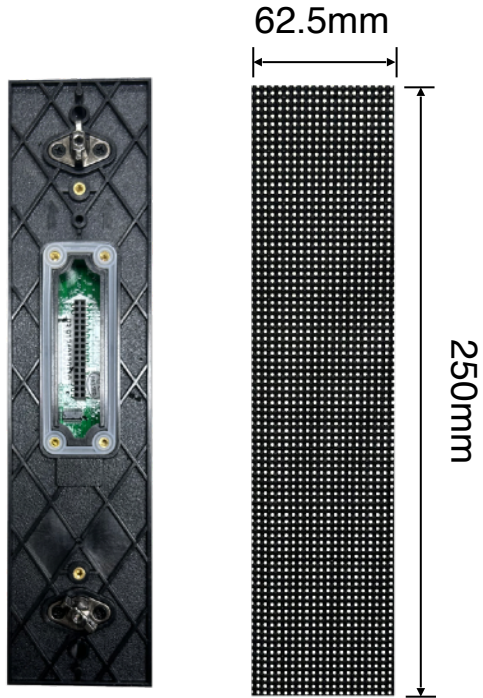

Schematic diagram of corner

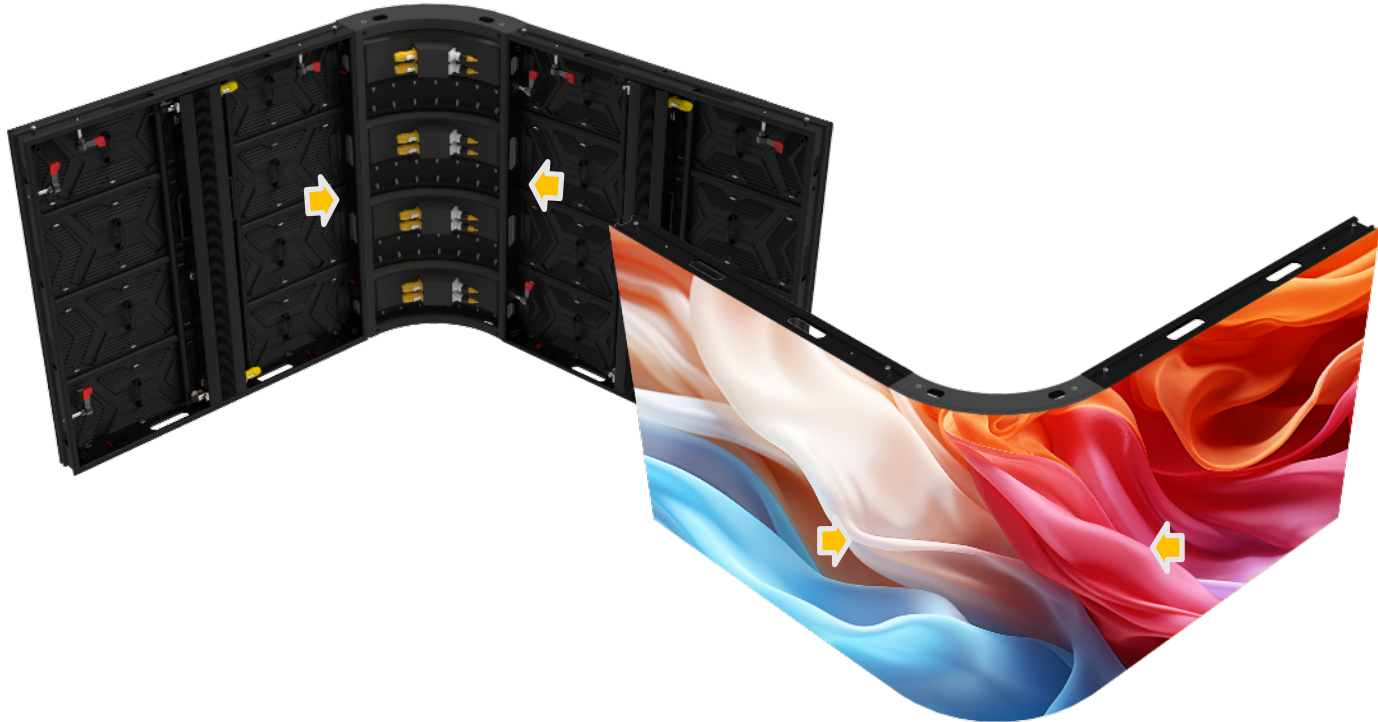

Maintenance

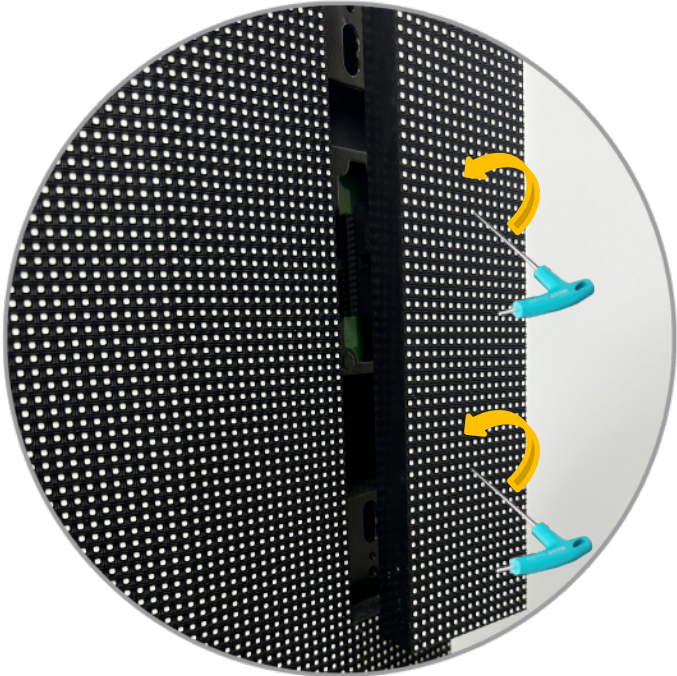

Front Maintenance



Rear Maintenance



Both front and rear can be IP65 waterproof level



Seamless Splicing



High Refresh Rate



High refresh rate



Low refresh rate

High Grey Scale



High grey scale



High grey scale

Wide Viewing Angle

Perfect presentation of images from any angle





90 Degree curved corner



LED column



Pixel Pitch

P2.976

P3.91

P4.81

P6.25

P7.81

P10.42

LED Type	SMD1921	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Physical Density(Dot/m ²)	112896	65535	43264	25600	16384	9216
Module Resolution	14X84	16X64	13X52	10X40	8X32	6X24
Module Size(WXH)	41.66X250	62.5X250	62.5X250	62.5X250	62.5X250	62.5X250
Cabinet Size(mm)	624.96X1000	562.5X1000	562.5X1000	562.5X1000	562.5X1000	562.5X1000
Cabinet Resolution	210X336	144X256	117X208	90X160	72X128	54X96
Module Quantity (WXH)	15X4	9X4	9X4	9X4	9X4	9X4
Cabinet Weight(kg)	28	24.6	24.6	24.6	24.6	24.6
Maintenance Mode	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Material	iron	iron	iron	iron	iron	iron
Brightness(Nits)	4500-8000(Optional)	5000-8000(Optional)	5000-8000(Optional)	6000-10000(Optional)	6000-10000(Optional)	6000-10000(Optional)
Color Temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing Angle(V/H)	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°
Evenness	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1	≤0.1
Frame Frequency	15000 : 1	15000 : 1	15000 : 1	15000 : 1	15000 : 1	15000 : 1
Drive Mode	50/60	50/60	50/60	50/60	50/60	50/60
Grey Scale	1/21 scan	1/16 scan	1/13 scan	1/8 scan	1/4 scan	1/2 scan
Refresh Rate(Hz)	16bit	16bit	16bit	16bit	16bit	16bit
Max Power Con.(W/m ²)	3840-7680	3840-7680	3840-7680	3840-7680	3840-7680	3840-7680
Ave Power Con.(W/m ²)	780	780	780	780	780	780
Protection Level	200-300	200-300	100-200	100-200	200-300	200-300
IP65	IP65	IP65	IP65	IP65	IP65	IP65
Power Input	AC90-264V,47-63Hz					
Operation T/H(°C/RH)	-20~60°C/10%~85%					
Storage T/H(°C/RH)	-20~60°C/10%~85%					
Certification	CCC/CE/RoHS/FCC/CB/TUV/IEC					

THANKS